




# PROTEX

*Oil-proof and water-proof  
for stone*

Suitable for the treatment of smoothed stones. We also recommend PROTEX on sandy amorphous material mixed with the presence of silicate and calcium carbonate. After the application a light increase of color can be seen but depends on the type of stone and where the product is applied. Good resistance to outside conditions. PROTEX gives protection against stains and does not create superficial films.

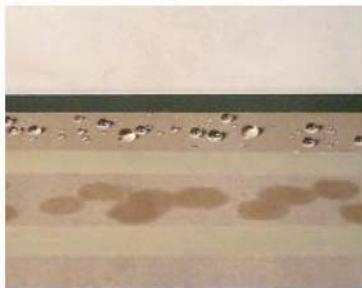

## Instructions for use

Clean the surface from dust, grease and any kind of dirt. The presence of any substance on the surface may influence the final effect of anti-stain. Apply the Protex on the surface by using a brush, sponge or a clean cloth. Let the stone absorb the Protex. Wait few minutes and clean off the excess. The excess may create a superficial sticky film. Repeat this treatment at least 2 times. The effect of anti-stain will be achieved after 24 hours.

## Shelf life :

The products will last at least 2 years in the normal condition between 18-25°C, kept away from source of heat, humidity and sun light .

## Quantity to be used:

Depends a lot from the stone. Normally with 1 liter is possible to treat 10-15 square meters of stone. The consume depends a lot from the porosity of the material.



Available at:

**Superprem**

Your Stone Tool Source!

[Superprem.com](http://Superprem.com)

[StoneToolSource.com](http://StoneToolSource.com)

1-866-808-3838

Specifications subject to change without notice. All rights reserved.